



# IJSRM

INTERNATIONAL JOURNAL OF SCIENCE AND RESEARCH METHODOLOGY

An Official Publication of Human Journals



Human Journals

**Research Article**

August 2020 Vol.:16, Issue:2

© All rights are reserved by Mahamadou Hima ABDOULAYE et al.

## Contribution of Geothermal Approaches to the Study of Thermal Waters in the Region of Agadez (North-East of Niger)



**Mahamadou Hima ABDOULAYE\***, Haoua  
**AMADOU, Mahaman Sani LAOUALI, Abdou Salam  
MANZOLA**

*Faculty of Science and Technology  
Abdou Moumouni University /Niamey/BP 10662, Niger.*

**Submission:** 25 July 2020

**Accepted:** 01 August 2020

**Published:** 30 August 2020



HUMAN JOURNALS

[www.ijsrm.humanjournals.com](http://www.ijsrm.humanjournals.com)

**Keywords:** Geothermal Energy, Thermal Springs, Saturation Index, Electricity, Agadez

### ABSTRACT

This study aims to estimate the temperatures reached in thermal springs reservoirs in the region of Agadez through the application of the most commonly used geothermal equations (Silica, Na/K, Na-K-Ca, Na-K-Mg) and to compare these values with those calculated from the saturation indices. The equations of these geothermometers were processed with the Excel software. The Aquachem software allowed us to know the state of equilibrium between the rocks and the thermal water and to draw the Giggembach diagram for the estimation of the reservoir temperatures of the different springs. The saturation indices (SI) show that the waters in the study area are under-saturated with respect to Halite (NaCl), Gypsum (CaSO<sub>4</sub>, 2H<sub>2</sub>O), Fluorite and Anhydrite (CaSO<sub>4</sub>). The temperature results show that the silica geothermometers (temperature between 42-100°C), the Giggembach ternary diagram (temperature between 40-100°C) and the saturation index (temperature between 60-90°C) give the same 40-100°C estimation intervals. The Agadez thermal springs can be classified among the medium energy geothermal sources, thus the possibility of recovering these sources through the production of electricity, the drying of agricultural products or metal recovery.

## 1. INTRODUCTION

Geothermal energy is the set of techniques that extract heat from the subsoil and transform it into a source of electricity or heat.

There are three methods for estimating the temperature of a geothermal deposit: geological, geophysical and geochemical methods.

The geological methods are based on aerial photographs and satellite imagery, the purpose of which is to search for tectonic and volcanic zones and structures and hydrothermal alterations [1].

Geophysical methods involve the use of instruments such as gravimeters. The goal is to define the lateral density variation related to the magmatic body at depth, which represents the heat source.

Geochemical methods (chemical geothermometers) are based on the chemical composition of thermal springs. It is the latter method that we will use to estimate the temperature of our geothermal reservoirs, given the lack of adequate technical means to use geophysical and geological methods.

Moreover, geochemical methods are the most widely used in geothermal prospecting using chemical geothermometers. These methods are based on the balance of minerals within a geothermal reservoir.

This work is a contribution to the development of the thermal springs of Agadez. The objective is to study the geothermal energy of these springs in order to know the fields of use (electricity production, heating of premises, drying of agricultural products, recovery of metals etc).

## 2. PRESENTATION OF THE STUDY AREA

Agadez is a region that covers the northern part of Niger between longitudes 6° and 15° and latitudes 16° and 22° with an area of 667,799 km<sup>2</sup> (52.6% of the total area of the country), it is the largest of the seven regions of the country. It is bordered: to the East by Chad, to the North by Libya and Algeria, to the West by the Republic of Mali. In the country, it is bordered by the regions of Tahoua, Maradi, Zinder and Diffa to the South.

The department of Tchirozerine is bordered to the north by the communes of Dannat and Timia, to the south by that of Aderbissanat, to the east by the rural communes of Tabelot and Dabaga and to the west by the rural commune of Ingall. It covers an approximate area of 26,539 km<sup>2</sup> with a perimeter of 601 km [2].

Three study areas have been identified (Figure 1):

- Our first study zone is located in the department of Tchirozérine, (village of Tafedek) located 20km from Tchirozerine in the North East of Agadez, at about 189 Km from Agadez, between 17°5'00" North latitude and 7°24'00" East longitude of the commune;
- The second study area is the department of Ingall located 160 km west of Agadez between 16°47'16" North latitude and 6°56'02" East longitude.
- The third study area is the department of Timia, located 224 km south-east of Arlit, (Uranium extraction city) and capital of the department, and 220 km north-east of Agadez, capital of the region. It covers an area of 32,000 km<sup>2</sup>, 70% of which is occupied by mounts. Timia is located in the central part of the Aïr between 17°50' and 18°15' North latitude and 8°30' and 9°00' East longitude. With a surface area of about 267.5 km<sup>2</sup>, it is bounded by three mounts: **Egalah** to the north, **Aroyan** to the east and **Iskou** to the south, peaking at 1855 m, 1134 m and 1708 m respectively [3].

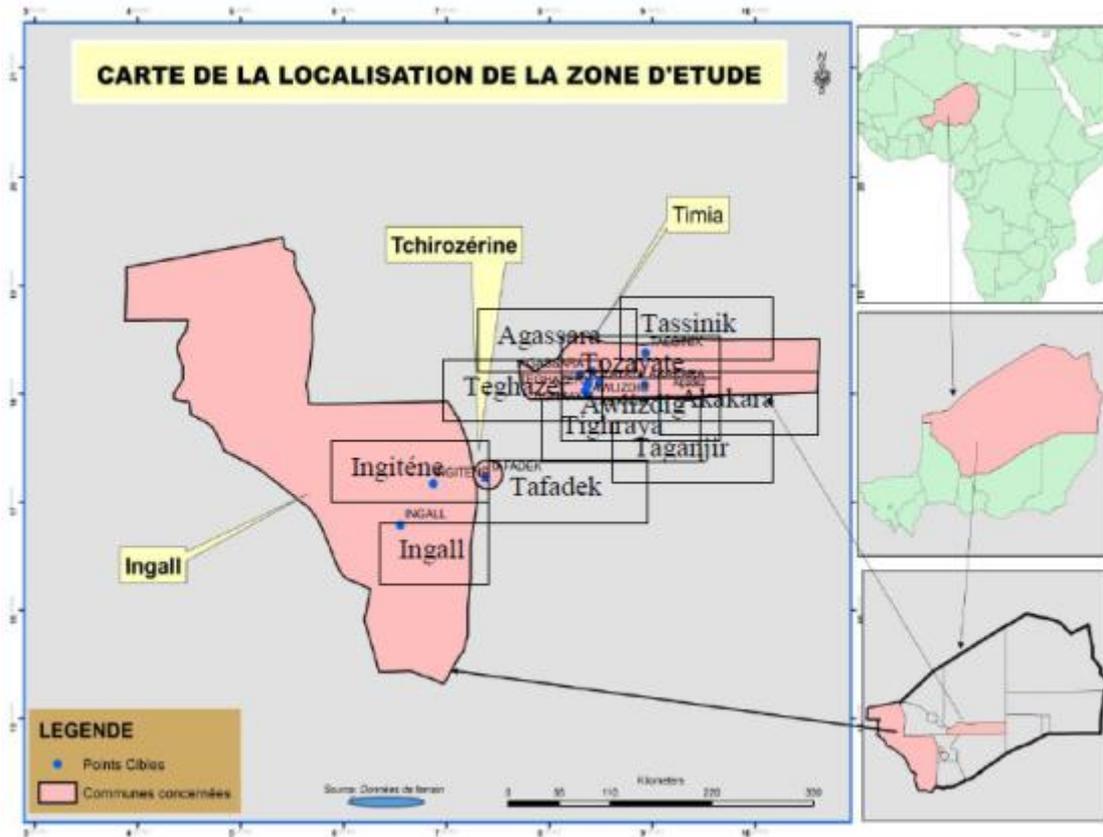


Figure No. 1: Map of study areas.

### 3. GEOLOGY AND HYDROGEOLOGY OF THE AREA

#### 3.1. Geology

The geology of the region of Agadez is subdivided into three (3) major groups:

- The extreme Northeast by the Bilma and Djado basins;
- The central part by the Aïr characterized essentially by metamorphic and granitic rocks.
- The southwestern part of the region represents the sedimentary rock domain.

The Aïr mount is a set of high crystalline and volcanic mounts emerging from an ancient basement. It is in fact an anticlinorium, made up of isoclinal folds leaning slightly to the east. The Precambrian basement zone of the Aïr is composed of deposits of folded and metamorphosed sedimentary rocks (gneiss, shales) and volcanic rocks dating from the Lower Proterozoic. These deposits, several kilometres thick, are intersected by granitoids dating

from the Suggarian and by eruptive rocks put in place during the Pan-African orogeny 600 million years ago (or in the Paleozoic for the most recent).

In the Jurassic, annular faults in the crystalline basement, located at an altitude of 500 to 1,000 m, allowed the surrection of granite peaks: Adrar Bous, Greboun (1,944 m), Mount Tamgak (1,988 m), Mount Agalak, Mount Bagzane (2,000 m) and Tarouadji. These summits are sometimes surmounted by volcanic cones or domes of various types and ages (some date from the end of the Cenozoic) [4].

### 3.2. Hydrogeology

Significant groundwater resources remain in the study area [4], mainly the Agadez sandstone table, the Precambrian basement table, the continental infill table, the Namurian table and alluvial aquifers:

***Aquifers of Agadez sandstones:*** it is a multilayered reservoir made of solidified wood, sandstone. It is made up of two large groups: the Teloua sandstones (which contain the Teloua 1, 2 and 3 aquifers) and the Tchirozerine sandstones (made up of the Tchirozerine 1 and 2 aquifers) which is an alternation of clayey sandstones with analcimes glomerules and coarse conglomerate vacuolar sandstones.

***Infill continental aquifer:*** This is a general captive aquifer with areas of open water near outcrops. It consists of lower Cretaceous sandstone and sandy-clayey continental deposits.

***Namibian Aquifer:*** This is a multilayered series of sandstone and clayey silt with a depth often exceeding 300 m. This Namurian aquifer is made up of the Tara aquifer at the top with a thickness of 25 to 50 m and the Guezouman aquifer at the base between 50 and 60m.

***Aquifer of the Precambrian basement:*** The basement of the basin is a foliated diorite with amphibole enclaves to which quartz veins and pegmatites are associated.

***Alluvial aquifers:*** these are shallow aquifers buried under permeable soils with coarse sands; their renewal is ensured by rainwater.

#### 4. MATERIALS AND METHODS

In this study, a sampling campaign was carried out in August 2019. The physicochemical analyzes were carried out on the thermal waters of Tafadek, Ingall, Tassinik, Ingiténe, Akakara, Teghazer, Agassara, Tozayate, Awlizdig, Taganjir, Tighraya, Tekarkar, Tiffadakéne, capturing the layers of Agadez sandstone, the Precambrian basement, the intercalary and alluvial continent, The choice of the aforementioned sources is dictated by the fact that these sources are the best known and used by the population. Water samples were collected in one liter capacity polyethylene bottles. The samples were taken until overflowing in vials previously rinsed with water from the slick, then capped and labeled. They were then stored at 4°C in a cooler and brought to the laboratory for analysis within 24 hours. The physical parameters, namely pH, temperature, conductivity and turbidity were measured in situ using a multi-parameter device from the cyber scan PC 300 brand. The analyzes focused on the following parameters: pH (hydrogen potential), EC (electrical conductivity); temperature (T); calcium ( $\text{Ca}^{2+}$ ), magnesium ( $\text{Mg}^{2+}$ ), potassium ( $\text{K}^+$ ), bicarbonate ( $\text{HCO}_3^-$ ), nitrate ( $\text{NO}_3^-$ ), nitrite ( $\text{NO}_2^-$ ), fluoride ( $\text{F}^-$ ), chloride ( $\text{Cl}^-$ ), sulfate ( $\text{SO}_4^{2-}$ ), sodium ( $\text{Na}^+$ ).

All these chemical elements were analyzed at the Niger Water Exploitation Company (SEEN) laboratory in Niamey. These analyzes were carried out using a Hach DR 1900 brand spectrophotometer and the conventional methods recommended by Rodier [5]. The results of these analyzes will make it possible from certain chemical elements to estimate the temperature of the thermal spring reservoirs in the region through the application of geothermometric equations on the one hand and through the calculation of saturation indices.

On the other hand, the most commonly used geothermometric equations are Silica, Na / K, Na-K-Ca And Na-K-Mg geothermometers. Different geothermal equations have been established by different autor [6; 7; 8; 9; 10; 11; 12; 13; 14; 15; 16].

The values found through the geothermometers will be compared with those found from the saturation indice.

## 5. PRINCIPLES AND CONDITIONS OF USE OF CLASSIC CHEMICAL GEOTHERMOMETERS

### 5.1. Silica geothermometer

The most widely used chemical silica geothermometers in the literature are chalcedony and quartz geothermometers [6; 17; 18].

They make it possible to calculate, from the silica content observed at emergence, the temperature at which quartz, chalcedony, cristobalite or silica, resulting from hydrolysis of the feldspars of crystalline rocks, have been dissolved, under reserve of verification that the observed silica does not come from dissolution at the level and temperature of the emergence, but it may very well be that part of the silica contained in the deep warm water has precipitated on the deposit of the water temperature [19]. These geothermometers give the temperatures at depth by the following formulas (Table 1).

**Table No. 1: Equations of silica geothermometers**

Geothermometers	Equations	Authors
Quartz (T <sub>1</sub> )	$T(^{\circ}\text{C}) = 1309 / (5.19 - \log [\text{SiO}_2]) - 273.15$	[6]
Quartz (T <sub>2</sub> )	$T(^{\circ}\text{C}) = 1522 / (5.75 - \log [\text{SiO}_2]) - 273.15$	[7]
Quartz (T <sub>3</sub> )	$T(^{\circ}\text{C}) = -55.3 + 0.3659[\text{SiO}_2] - 5.3954 \times 10^{-4}[\text{SiO}_2]^2 + 5.5132 \times 10^{-7}[\text{SiO}_2]^3 + 74.360 \log [\text{SiO}_2]$	[20]
Calcedoine (T <sub>4</sub> )	$T(^{\circ}\text{C}) = 1112 / (4.91 - \log [\text{SiO}_2]) - 273.15$	[15]
Quartz (T <sub>5</sub> )	12	[7]
Quartz (T <sub>6</sub> )	$T(^{\circ}\text{C}) = -42.198 + 0.2831[\text{SiO}_2] - 3.6686 - 4[\text{SiO}_2]^2 + 3.1665 \times 10^{-7}[\text{SiO}_2]^3 + 77.364 \log [\text{SiO}_2]$	[21]
Quartz (T <sub>7</sub> )	$T(^{\circ}\text{C}) = (-1117.3) / (\log [\text{SiO}_2] - 4.78) - 273.15$	[8]
Quartz (T <sub>8</sub> )	$T(^{\circ}\text{C}) = 1074 / (4.59 - \log [\text{SiO}_2]) - 273.15$	[22]

## 5.2. Geothermometers Na/K

The Na/K geothermometer is based on the equilibrium reached between a plagioclase and potassium feldspar. Na/K should not be applied to estimate the temperature if  $\sqrt{\frac{Ca}{Na}} < 1$  because the calculated temperature will be higher than the true water/rock interaction temperature. But it can be used to estimate the temperature of alkaline or near neutral waters, which do not have travertines, and/or waters with low calcium concentration and high content sodium [23; 6]. The advantage of this geothermometer is less sensitive to the effects of mixing or dilution. These geothermometers are governed by the following equations (Table 2):

**Table No. 2: Equations of geothermometers Na/K**

Geothermometers	Equations	Authors
Na-K (T <sub>9</sub> )	$T (^{\circ}C) = 933 / (0.993 + \log) - 273.15$	[15]
Na-K (T <sub>10</sub> )	$T (^{\circ}C) = 856 / (0.85 + \log) - 273.15$	[12]
Na-K (T <sub>11</sub> )	$T (^{\circ}C) = 883 / (0.78 + \log) - 273.15$	[14]

**5.3. Geothermometer Na-K-Ca:** The Na-K-Ca geothermometer is based on the perspective solubility of ions (Na, K and Ca), during reactions that affect minerals in crystallophyllian rocks and especially feldspars [6]. Estimated temperatures are calculated from the following equation:

$$T_{12} = \frac{1647}{\log\left(\frac{Na}{K}\right) + \frac{4}{3} \log\sqrt{\frac{Ca}{Na}} + 2,24} - 273,15$$

## 5.4. Na-K-Mg geothermometer

The Na-K-Mg geothermometer is based on the dependence of chemical reactions involving alkaline minerals, it provides two information on hydrotherapy from the ternary Na-K-Mg diagram proposed by [24]: it allows to know the state of equilibrium of the water with the surrounding depth on the one hand, and used to estimate the temperature of the Reservoir on the other hand [17]. The equations of these different geothermometers were processed using Excell 2013 software. The saturation indices were evaluated by the program PHREEQ of the

diagram software. These saturation indices also estimate the temperatures of geothermal reservoirs.

## 6. RESULTS AND DISCUSSION

The results of the various physicochemical analyzes carried out on the thermal springs of the Agadez region are presented in Table 3.

**Table No. 3: Results of the physico-chemical parameters**

Names	pH	T°	CE	Ca <sup>2+</sup>	Mg <sup>2+</sup>	Na <sup>+</sup>	K <sup>+</sup>	HCO <sub>3</sub> <sup>-</sup>	SO <sub>4</sub> <sup>2-</sup>	F <sup>-</sup>	NO <sub>3</sub> <sup>-</sup>	Cl <sup>-</sup>	SiO <sub>2</sub>	Li
Tafadek	7,9	54,8	2000	6	150	600	180	2300	230	4	2	130	40	0,05
Ingall	9,5	49	4000	9	92	800	170	3000	282	2	1,86	50	28,5	0,02
Ingiténe	9	36	850	7,5	100	750	171	2900	290	2,3	1,1	70	15	0,011
Akakara	8,5	32,5	433	27	20,04	97,06	40,17	300,73	67,2	20,9	63,86	49,34	25	0,5
Tassinik	6,5	35	6780	18,3	2	699,5	99	350	280,8	1,5	4	750	5	0,14
Tighraya	6,8	37,5	3230	6	98,04	1193,93	146,25	366	147,84	18,5	63,86	231,46	18	0,03
Taganjir	9,6	29,3	7450	5	45,96	2512,06	121,68	2990,22	282,24	0,38	16,12	2737,05	17,1	0,06
Teghazer	7,9	30,2	2980	7	86,96	597,04	181,13	2290,16	97,92	1,95	1,86	136,03	16,8	0,09
Tiffadakéne	7,9	29	615	23	14,04	86,02	3,9	189,1	48,96	1,14	42,7	47,25	30	1,07
Tekarkar	9,2	26,7	218	21	15,96	13,11	3,12	101,26	12,96	0,96	17,98	23,075	25	0,03
Awlizdig	9,8	27,2	202	28	21,96	32,89	5,07	203,74	13,92	1,9	21,7	47,57	35	0,07
Agassara	8,2	34,9	235	29	6	19,09	5,85	114,68	22,08	0,57	1,86	13,135	28	0,078
Tozayate	7,1	31,8	375	30	12,96	34,04	5,07	210,45	21,12	0,95	1,86	14,91	21,05	0,06

6.1. Analyse Et Interpretation Des Geothermometers A Silice, Na/K, Na-K-Ca


Table No. 4: shows the results of the (12) classical geothermometers


Names	T <sub>1</sub>	T <sub>2</sub>	T <sub>3</sub>	T <sub>4</sub>	T <sub>5</sub>	T <sub>6</sub>	T <sub>7</sub>	T <sub>8</sub>	T <sub>9</sub>	T <sub>10</sub>	T <sub>11</sub>	T <sub>12</sub>	T°(em)
Tafadek	91,6 8	93, 77	34, 47	63, 01	75,8 94	47, 19	78, 42	86, 29	361, 49	371, 85	429, 24	353, 85	54,8
Ingall	77,3 0	81, 20	30, 51	48, 68	64,0 62	44, 06	62, 86	69, 41	311, 78	316, 35	365, 75	396, 85	49
Ingiténe	52,9 6	59, 60	25, 60	24, 66	46,4 75	40, 17	36, 87	41, 44	311, 78	316, 35	365, 75	396, 85	36
Akakara	72,0 4	76, 56	29, 27	43, 47	60	43, 08	57, 21	63, 30	447, 85	470, 53	543, 66	161, 85	32,5
Tighraya	59,5 28	65, 46	26, 72	31, 11	50,9 11	41, 07	43, 83	48, 91	218, 91	215, 13	251, 48	378, 85	37,5
Taganjir	57,7 61	63, 89	26, 41	29, 37	49,6 95	40, 81	41, 96	46, 89	218, 91	215, 13	251, 48	378, 85	29,3
Teghazer	57,0 1	63, 22	26, 28	28, 63	49,1 85	40, 71	41, 16	46, 04	361, 49	371, 85	429, 24	385, 85	30,2
Tiffadakéne	79,4 0	83, 05	31, 04	50, 77	65,7 26	44, 48	65, 13	71, 86	163, 00	155, 68	185, 28	60,8 5	29
Tekarkar	72,0 4	76, 56	29, 27	43, 47	60	43, 08	57, 21	63, 30	311, 78	316, 35	365, 75	42,8 5	26,7
Awlizdig	85,8 8	88, 71	32, 77	57, 21	70,9 92	45, 85	72, 12	79, 45	278, 27	279, 47	323, 88	56,8 5	27,2
Agassara	76,5 8	80, 56	30, 34	47, 97	63,4 98	43, 92	62, 08	68, 57	361, 49	371, 85	429, 24	58,8 5	34,9
Tozayate	65,3 7	70, 66	27, 85	36, 88	55,0 56	41, 95	50, 07	55, 61	278, 27	279, 47	323, 88	58,8 5	31,8

The application of twelve (12) geothermometers to our sources indicates that the T<sub>3</sub> geothermometer gives reservoir temperatures lower than the emergence temperature (Tem) for all sources, therefore this geothermometer underestimates the temperatures of the reservoirs.

The T<sub>1</sub>, T<sub>2</sub>, T<sub>4</sub>, T<sub>5</sub>, T<sub>6</sub>, T<sub>7</sub> and T<sub>8</sub> silica geothermometers give reservoir temperatures between 43 and 100 ° C (figure 2). These values are higher than the emergence temperatures and lower than the quartz precipitation temperatures (160 ° C). The Na-K T<sub>9</sub>, T<sub>10</sub> and T<sub>11</sub> geothermometers give higher temperatures than those calculated by silica geothermometers where they sometimes triple. These geothermometers are not within the estimated temperature range (25 ° C-250 ° C) given by [13; 14] therefore these geothermometers overestimate the temperatures of the reservoir.

The results of the Na-K-Ca geothermometer divide the hot springs into two groups. The first group shows temperatures below 100°C . These are the sources of Tiffadakéne (60.85°C), Tekarkar (42.85°C), Awlizdig (56.85°C), Agassara (58.85 ° C) and Tozayate (58.85°C). The second group shows sources of temperatures above 100°C (Tafadek, Ingall, Ingiténe, Akakara, Tighraya, Taganjir and Teghazer) (Figure 2). This difference could be related to balance problems within the reservoir of these sources.

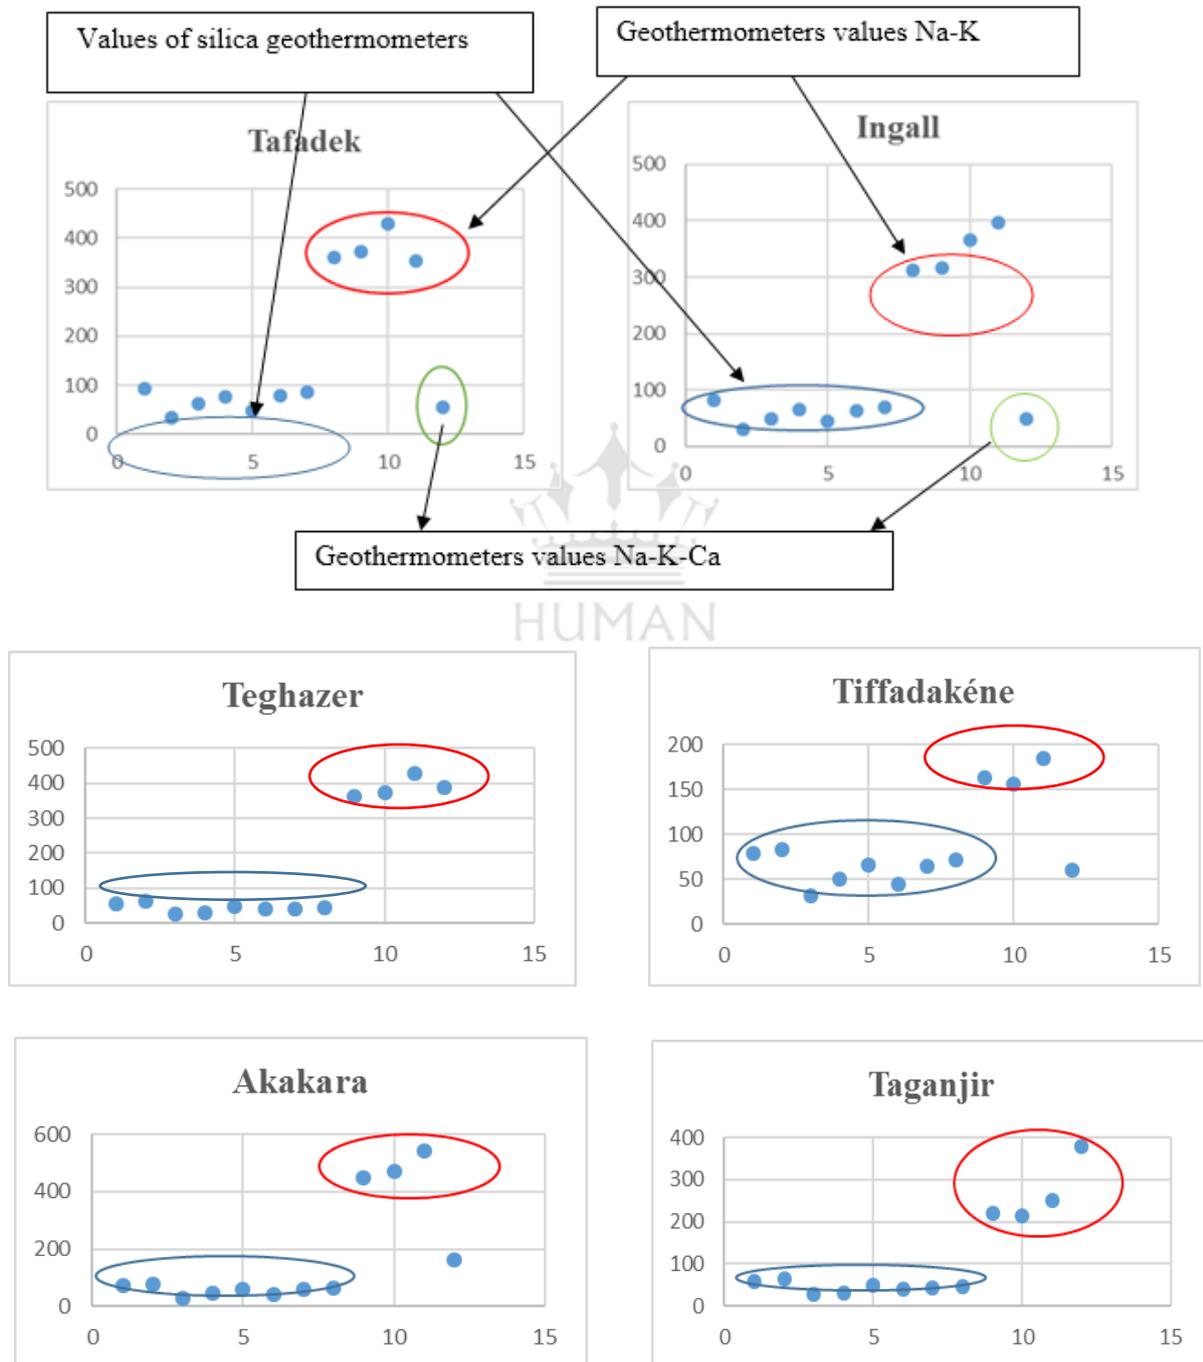


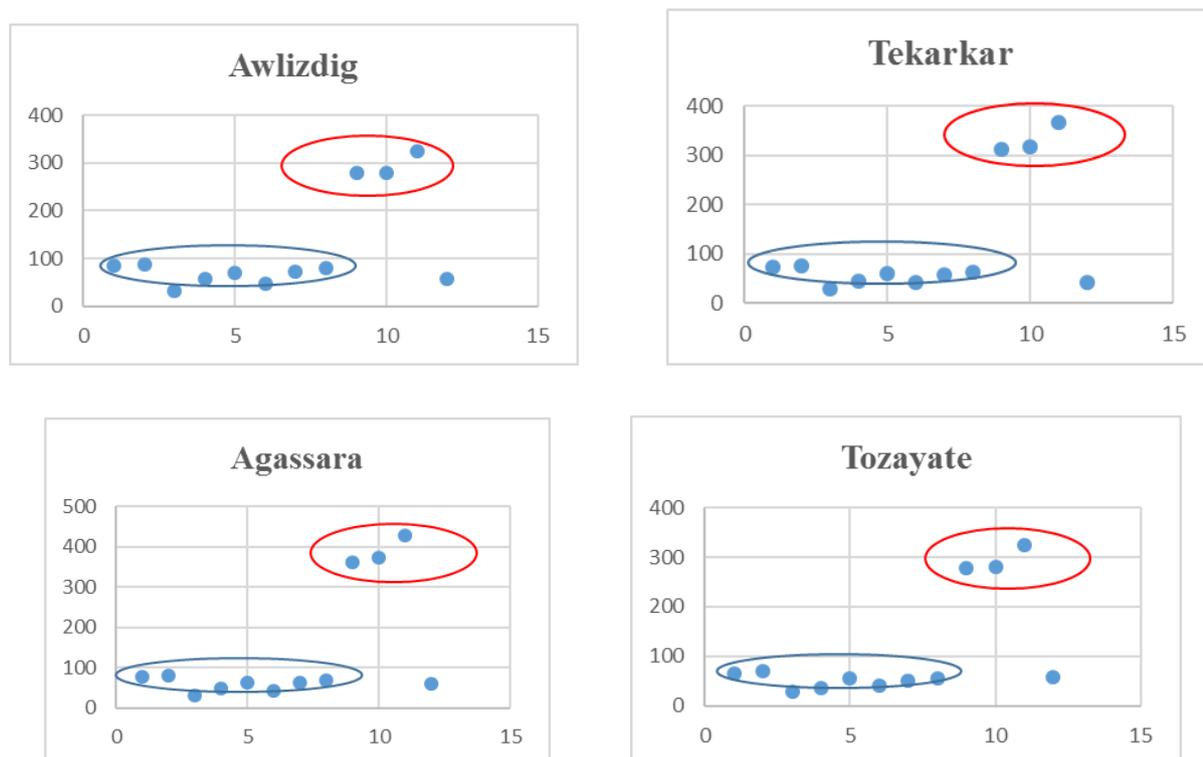

**Figure No. 2: Thermal water temperatures calculated using different geothermometers**

## 6.2. Analysis And Interpretation Of The Ternary Diagram Na-K-Mg

On the Giggenbach Na-K-Mg diagram established from the aquachem software, the thermal springs of Ingall, Akakara, Tiffadakene, Tekarkar, Awlizdig, Tozayate Agassara are concentrated at the level of the magnesian pole (figure 3). This indicates that the thermal waters of these areas correspond to immature waters. This may suggest a strong dilution/mixing with cold shallow water. Giggenbach's Na-K-Mg diagram also shows that the thermal water of Tassinik is partially in equilibrium with the various minerals. The ternary diagram (figure 3) shows that the temperature of the tanks of thermal systems varies between 40 to 100°C. These results agree with silica geothermometers (43 to 100°C).

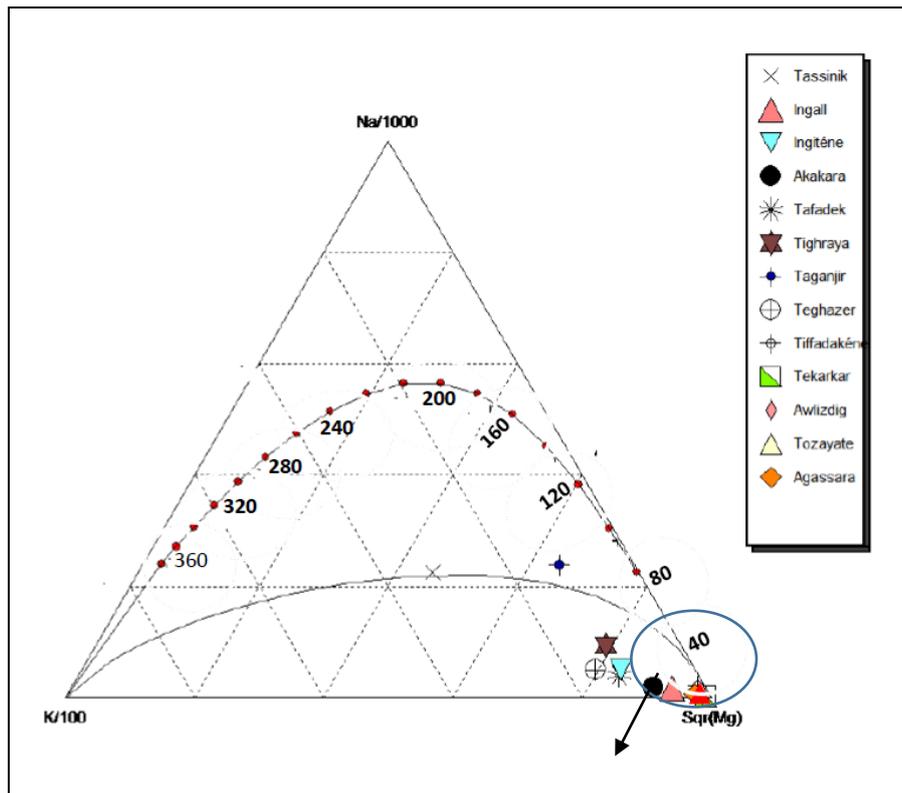

(Ingall, Akakara, Tiffadakene, Tekarkar, Awlizdig, Tozayate Agassara)

**Figure No. 3: Representation of water on Giggenbach Na-K-Mg diagram.**

### 6.3. Interpretation of the temperature from the values of the saturation indices

The degree of saturation of water can be estimated by calculating the saturation index, which reaches zero when the solution is in equilibrium with a solid phase. A negative saturation index indicates undersaturation and a positive index indicates over-saturation with respect to minerals [25]. Firstly, the saturation indices (SI) were calculated for all the waters sampled from the most complete analysis possible, taking into account the temperature at emergence, the major elements and traces contained in the waters. The saturation index thus calculated for the phases present in the rocks, underline the importance of interactions between water and carbonates on the one hand and evaporates on the other.

Thermodynamic interpretation using the simulation of the concentration of major ions (Cl<sup>-</sup>, SO<sub>4</sub><sup>2-</sup>, HCO<sub>3</sub><sup>-</sup>, Ca<sup>2+</sup>, Mg<sup>2+</sup>, Na<sup>+</sup>, K<sup>+</sup>) under the effect of isothermal evaporation at 25°C, by the thermodynamic software “Phreeq C” in terms of salt/solution equilibrium, shows that the waters of the study area are:

- Undersaturated with a saturation index less than zero compared to Halite (NaCl), which causes dissolution, leading to an enrichment of the region in sodium and chlorides (figure 4).
- Undersaturated with respect to Gypsum ( $\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$ ), fluorite and anhydrite ( $\text{CaSO}_4$ ), which causes precipitation and dissolution leading to enrichment of the water in calcium in sulfate and fluoride.

The various saturation index calculations make it possible to specify interaction with salts and carbonates for almost all of the sampling points.

The second step in calculating the saturation indices provides an indication of great interest on the temperatures reached in the reservoir and thus constitutes an additional control in the use of Chemical geothermometers. The method consists of introducing the chemical composition of the solution into the thermodynamic model used (Wateq4f) and performing the calculations for all temperatures within a range around the emergence temperature [26].

We plot the variation of the saturation index of solutions with respect to different minerals, as Functions of temperature [27]. Usually, we find that the solutions are out of balance with all minerals except for a narrow range of temperatures for which several minerals simultaneously present a situation close to equilibrium. This range will then be retained as the range of the most probable values of the Tank temperatures.

The saturation index were therefore calculated for different temperatures, with increasing temperature from 20 to 200°C in steps of 20°C. These calculations were carried out for some of our sources with the highest emergence temperatures, particularly those of Tafadek and Ingall.

The intersection of the curves of quartz, chalcedony, gypsum, anhydrite, dolomite and talc with the line  $IS = 0$  or very close to zero allow the temperature of the deep reservoir to be approximated at 90°C for the thermal spring of Tafadek and 60°C for the thermal spring of Ingall (Figure 5). These results were close to those found by silica geothermometers and Na-K-Mg geothermometers.

Saturation indice greater than zero

Saturation indice less than zero

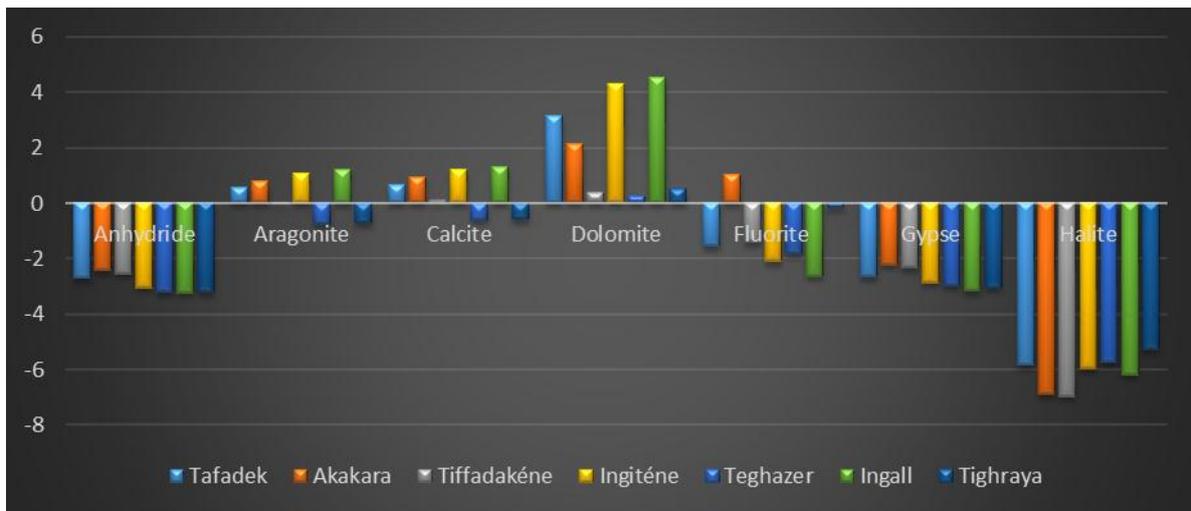
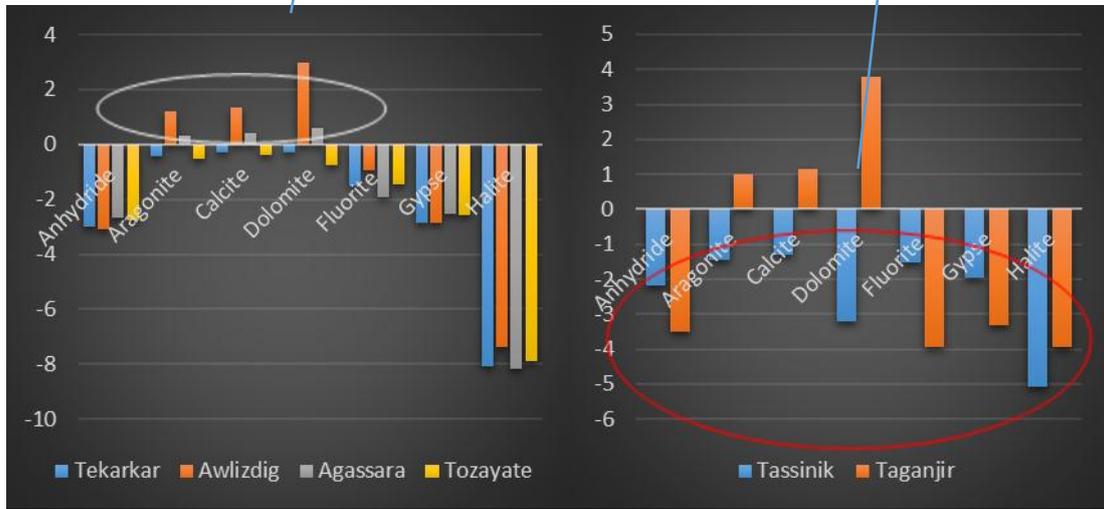


Figure No. 4: Saturation index of different minerals in thermal springs

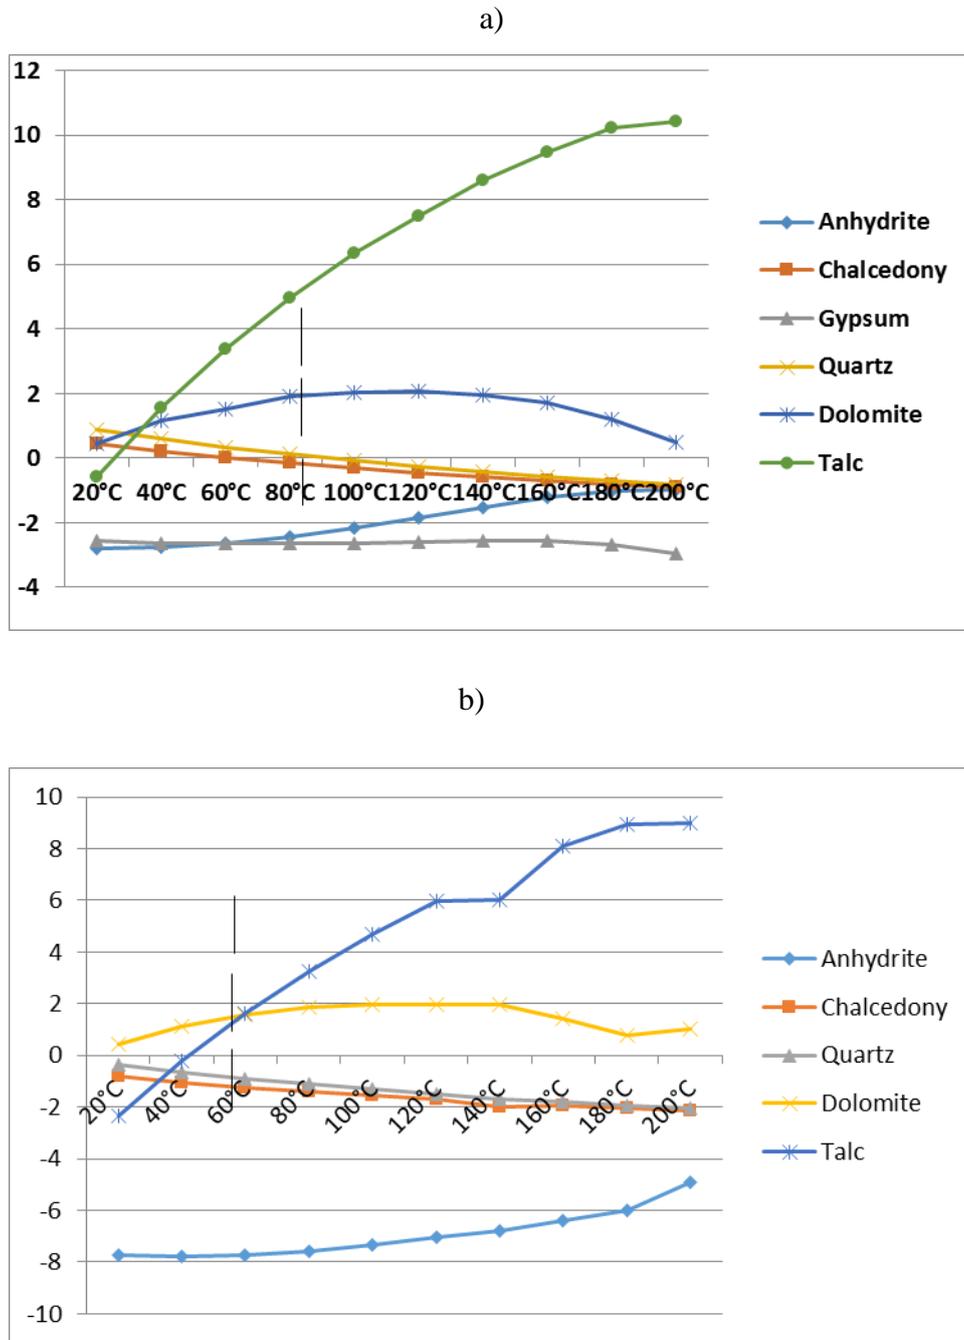


Figure No. 5: a. Mineral saturation index at different temperatures for Tafadek and 5b for Ingall.

## 7. CONCLUSION

The application of different geothermometers, the Gigembach diagram and the saturation indices allowed us to estimate the temperatures reached in the geothermal reservoirs of our thermal springs. Geothermometers based on silica and quartz, gave temperatures that were close, in a range of 42°C to 100°C for the majority of our thermal springs. The ternary diagram (Giggenbach, 1988) as well as the IS method (saturation index) also make it possible to obtain temperatures which were close, 40°C to 100°C for the Gigembach diagram and 60°C to 90°C for the saturation index, which leads us to conclude that the reservoir temperatures of the sources in the Agadez zone are between 40°C and 100°C. This interval makes it possible to classify these sources among sources with medium-energy geothermal energy (90 to 150°C) on the one hand and low-energy geothermal sources (30 to 90°C). Therefore, the temperature of the Agadez thermal spring reservoirs could be used as well as for power generation, agricultural products drying and metal recovery (especially the Tafadek thermal spring). The calculated saturation index highlights the importance of interactions between waters and carbonates on the one hand and between water and evaporites on the other. They show that the waters of the study area are undersaturated (saturation index less than zero) with respect to Halite (NaCl) and undersaturated with respect to Gypsum ( $\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$ ), fluorite and anhydrite ( $\text{CaSO}_4$ ). The disparity in the calculated temperatures can be linked to the numerous modifications of the element contents, in particular those due to water-rock interactions as well as the phenomena of dissolution, precipitation and mixing.

## REFERENCES

1. Accadebled, M, Projet. (2004). géothermie-Réunion Accompagnement au passage de la phase de la ressource géothermale à la reconnaissance par forage'', Université la Rochelle, la Réunion, France. 2,3p.
2. ACSSA - Afrique Verte Niger, GIE Tagazt. (2010). étude sur les possibilités de développer la culture du blé et du maïs dans la région d'Agadez, Rapport Final. 35P.
3. Illias Allassane. (2018). Evaluation des ressources en eaux souterraines du bassin de Timia (massif de l'Aïr, Nord du Niger) : impacts de la variabilité climatique et des activités anthropiques'', Thèse de doctorat, Université Abdou Moumouni de Niamey, Faculté des Sciences et Techniques, 238p.
4. Greigert, J. (1978). Atlas des eaux souterraines du Niger (état de connaissances) Bureau de recherche géologique et minière. Agence d'étude géologique appliquée à l'étranger'' République du Niger, Ministère des mines et de l'hydraulique, 438p.
5. Rodier, J., Legube, B. et Merlet, N. (2009). L'analyse de l'eau (9e Edition)'', Ed Dunod, Paris, 1579 pp.
6. Fournier R.O. (1977). Chemical geothermometers and mixing models for geothermal systems'', Geothermic, 5, p. 221-224.
7. Fournier R.O, Truesdell A.H. (1973). An empirical Na-K-Ca geothermometer for natural waters, Geochim. Cosmochim. Acta, 37,p. 1255-1275.

8. Verma M.P. (2000). Limitation in applying silica géothermometers for geothermometers for geothermale reservoir evaluation, Proceed. 25<sup>th</sup> workshop on Geoth. Res. Eng., Stanford Université Stanford, California, January 24-26.
9. Arnorsson S. (2000). The quartz and Na/K geothermemeters. I, New thermodynamic calibration, Proceedings word geothermal Congress 2000, p. 929-934.
10. White D.E. (1965). Saline waters of sedimentary rocks (Fluids in Subsurface Environments-Symposium)'' Am. Ass, Petrol. Geol. Mem, 4, p. 342-366.
11. Ellis A.J. (1969). present-day hydrothermal systems and mineral deposition Ninth Commonwealth Mining and Metallurgical Congress, Mining and Petroleum Geology Sect. Paper, 7, 30p.
12. Truesdell A.H., Fournier R.O. (1977). Procedure for estimating the temperature of a hot-water component in a mixed water by using a plot of dissolved silica versus enthalpy'', J. Res. U.S. Geol. Survey, 5, n°1, p.49-52.
13. Truesdell A.H. (1975). Summary of section III, Geochemical technique in exploration, Proc. Second United Nations Symposium on the development and use of Geothermall Resources, 1.3.
14. Tonani F. (1980). Some remarks on the application of geochemical techniques in geothermal exploration. In:Proc. Second Symposium, Strasbourg, p.428-443.
15. Arnorsson S., Gunnlaugsson E., Svarsson H. (1983). The geothermal waters in Iceland. II. Mineral equilibria and independent variables controlling water composition'', Geochim. Cosmochimie.
16. Paces T. (1975). Letter to editor. A systematic deviation from Na-K-Ca geothermometer below 75°C and above 10<sup>-4</sup> atm Pco<sub>2</sub>, Geochim. Cosmochim. Acta, 39, p.541-544.
17. Verma S.P., Santoyo E. (1977). New improved equations for Na/K, Na/Li and SiO<sub>2</sub> geothermometers by outlier detection and rejection'', J. of Volcano, And Geotherm, Res., 79p. 9-23.
18. Fournier R.O., Potter R.W. (1982). A revised and expanded quartz geothermometer'', Geothermics, 12,p, 199-222.
19. Michard G. (2002). Chimie des eaux naturelles. Principes de géochimie des eaux'' Edition Publisud, 445p.
20. Arnorsson S., Andresdotter A., Gunnarsson I. et Stefansson A. (1998). New Calibration for the Quartz and Na/K Geothermometers - Valid in the Range 0-350°C., Proc. Geoscience Society of Iceland Annual Meeting, April 1994. Icelandic, pp. 42-43.
21. Fournier R.O., Potter R.W. (1982). A revised and expanded quartz geothermometer. Geothermics, 12,p. 199-222.
22. Giampaolo C., Gorgoni C., Mottana. A.(1992). Experimental water-rock interaction: silica geothermometers in the temperature range 100-350°C. Eur J. Mineral, 4, p. 53-65.
23. BRGM. (1999). Les géothermomètres chimiques. Note technique n° 13'', Division Nationale des Eaux, BRGM. France. 18 p.
24. Giggenbach W.F., 1988: Geothermal solute equilibria. Derivation of Na-K-Mg-Ca geoindicators. Geochim. Cosmochim. Acta 52, 2749-2765.
25. Benhamza Moussa, Rihia Djamel, Bekkouche Mohamed Faouzi. (2015). Hydrogeochemistry and balance between minerals and solutions in the mercurial zone of Azzaba, Northeast of Algeria, Energy Procedia. Volume 74, August, P. 1133–1141.
26. Haouchine. B Fatima-Zahra (2010). Etude Hydrogéochimique des sources Thermales de l'Algérie du Nord-potentialités géothermiques'' Thèse de doctorat, spécialité : hydrogéologie, Université des Sciences et de la technologie « Houari Boumediene » Faculté des Sciences de la Terre et de l'Aménagement du territoire,178p.
27. Alban. (2006). Origine et processus de minéralisation d'eau thermale en milieu continental méditerranéen : cas du système géothermale des Thermopyle. Thèse de doctorat en science de la terre à l'université sud11 Faculté des sciences d'Orsay.

<i>Image</i> <i>Author -1</i>	<b><i>Mahamadou Hima ABDOULAYE</i></b> <i>Water chemistry laboratory, Faculty of Science and Technology.</i> <i>Abdou Moumouni University /Niamey/BP 10662, Niger.</i>
<i>Image</i> <i>Author -2</i>	<b><i>Amadou Haoua</i></b> <i>Water chemistry laboratory, Faculty of Science and Technology.</i> <i>Abdou Moumouni University /Niamey/BP 10662, Niger.</i>
<i>Image</i> <i>Author -3</i>	<b><i>Mahaman Sani Laouali</i></b> <i>Water chemistry laboratory, Faculty of Science and Technology.</i> <i>Abdou Moumouni University /Niamey/BP 10662, Niger.</i>
<i>Image</i> <i>Author -4</i>	<b><i>Abdou Salam Manzola</i></b> <i>Water chemistry laboratory, Faculty of Science and Technology</i> <i>Abdou Moumouni University /Niamey/BP 10662, Niger.</i>

